



Remote Programming & Maintenance

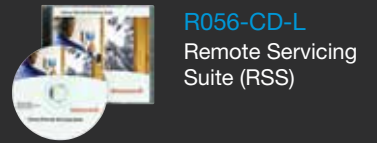

Wireless peripherals range

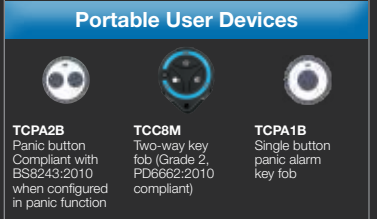

Note: Peripherals compatible with Galaxy Flex, Galaxy Dimension (>V6.5) and G2 (>V1.5)
 * 'PI' indicates pet tolerant version

Maximum Capacity	GD-48	GD-96	GD-264	GD-520
RIO or PSU RIO	4	10	31	63
MK7 or MK8 keypads	8	16	16	32
MK7 or MK8 Keyprox	3	7	7	24
Bus mounted prox readers (MAX)	4	16	16	32
DCMs (with 2 x Wiegand interfaces)	4	16	16	32
Controlled doors (by DCM)	8	32	32	64
RF Portal	4	8	8	8
Audio interface	1	1	1	1
Audio Mux	2	4	8	8
Audio channels with TP800	8	16	32	32
Ethernet module / GPRS module	1	1	1	1